

DOI: <https://doi.org/10.24297/jap.v22i.9561>**Laser heating of a finite silver sulfide slab ( $Ag_2S$ ). An elegant analytical solution using Laplace integral transform method.**

M. K. El-Adawi\*, S. A. Shalaby, S.S.Mostafa, and S. A. Antar.

Department of physics, Faculty of Education, Ain Shams University,

Heliopolis, Cairo, Egypt.

**ABSTRACT**

The problem of heating a finite silver sulfide slab with cw laser is studied using Laplace integral transform technique. For a certain laser power irradiance an expression for the temperature profile within the slab is obtained. The temperature variations with time for the front and rear surfaces are also obtained. The critical time required to initiate melting can thus be computed. Computations for an illustrative example are given. The obtained results reveal.

**KEYWORDS:** laser heating, Silver sulfide target, Laplace integral transform, Analytical solution, Critical time to initiate damage.

**1. Introduction**

Laser heating is an accepted process for industrial applications. The ability of high-power lasers (up to  $10^{12} \text{ W/m}^2$ ) makes them useful for a variety of material processing techniques, such as spot welding, scribing, drilling of holes, laser cutting, laser shock hardening, and laser glazing [1,3,4]. In the semiconductor industry many other applications of laser heating are developed, including both local diffusion and alloying to form p-n junction. Indeed laser-solid interaction have aroused considerable interest of many investigators. [1,3-8,10-13,16,17].

Different models and techniques are used to obtain solutions for topics related to such important problem. Trials are still made in order to get solutions in a well-established form, applicable for practical computations. The study of laser damage of the irradiated target is a serious problem either to avoid damage to extend their life time as in the case of laser mirrors [5], or to initiate damage (melting) when it is necessary. The importance of this problem has encouraged authors to develop several models both analytical or numerical to treat the suggested heating problem. The source function in such attempts is considered to be either cw or pulsed laser. The aim of the present article is to study the problem of laser heating of a homogenous finite slab of silver sulfide ( $Ag_2S$ ) material. This compound is of great technological importance to be used as chemosensors and biosensor. [14] The optical absorption properties of the synthesized nanomaterials indicate that nanoplates can be used as optical sensors [14]

Moreover, the silver sulfide thin films have photoconductivity and photovoltaic properties [9]. Thus this material is a promising material in preparation of photovoltaic solar cells. It is an inorganic compound. Moreover, authors [18] indicated the importance of using ( $Ag_2S$ ) semiconductor near-infrared (NIR) as a photocatalyst. It realized degradation rate of the methylene blue dye equal 100% within two hours under sunlight exposure, which has technological importance.

**2. Theoretical approaches**

In setting up the problem we shall consider a laser flux  $q_0$  ( $\text{W/m}^2$ ) incident in a perpendicular direction (on the front surface of a silver sulfide slab of thickness "d" along the x-direction.

The heat flow is considered one dimensional [1].

The case of cooling at both the front and rear surfaces is considered.

The laser irradiance  $q_0$  is assumed to be constant i.e CW laser is considered.

According to our model, a part of the incident laser flux will be reflected at the front surface and a part ( $Aq_0$ ) will be absorbed by the slab material. where "A" is the absorption coefficient, The multireflections within the slab are neglected.

The physical properties of the considered material are assumed to be temperature independent for simplicity. Heat losses arising from convection at both the front and rear surfaces are considered while losses due to thermal radiation are neglected.

The heat diffusion equation for the considered problem is written in the form:

$$\frac{\partial T(x, t)}{\partial t} = \alpha \frac{\partial^2 T(x, t)}{\partial x^2}, \quad 0 < x \leq d, t > 0 \quad (1)$$

Where  $\alpha = \frac{\lambda}{\rho c_p}$  the thermal diffusivity of the slab material in terms of the thermal conductivity  $\lambda$  (W/m K) and the heat capacity per unit volume  $\rho c_p$  ( $\frac{J}{m^3 K}$ ),  $T$  is the excess temperature relative to the ambient temperature  $T_0$ ,  $T = (T' - T_0)$

Equation (1) is subjected to the following initial and boundary conditions:

$$T(x, 0) = 0 \quad \text{At the front surface } x=0 \quad (2)$$

$$-\lambda \frac{\partial T}{\partial x} \Big|_{x=0} = q_0 A - h_0 T(0, t) \quad (3)$$

The Heat Balance Equation in an integral form is:

$$\int_0^t q_0 A dt = \int_0^d \rho c_p T(x, t) dx + \int_0^t h_d T(d, t) dt + \int_0^t h_0 T(0, t) dt \quad (4)$$

To solve equation (1) let us apply Laplace Integral transform technique, according to which, the Laplace transform of equation (1) with respect to the time gives:

$$s\bar{T}(x, s) - T(x, 0) = \alpha \frac{d^2}{dx^2} \bar{T}(x, s) \quad (5)$$

Considering condition (2), equation (5) attains the form:

$$s\bar{T}(x, s) = \alpha \frac{d^2}{dx^2} \bar{T}(x, s) \quad (6)$$

The solution of equation (6) in the usual manner attains the form:

$$\bar{T}(x, s) = C_1 \exp\left(\sqrt{\frac{s}{\alpha}} x\right) + C_2 \exp\left(-\sqrt{\frac{s}{\alpha}} x\right) \quad (7)$$

The Laplace transform of the conditions (3) and (4) gives:

$$\lambda \frac{d}{dx} \bar{T}(0, s) = -\frac{q_0 A}{s} + h_0 \bar{T}(0, s) \quad (8)$$

And

$$\frac{q_0 A}{s^2} = \int_0^d \rho c_p \bar{T}(x, s) dx + \frac{h_d}{s} \bar{T}(d, s) + \frac{h_0}{s} \bar{T}(0, s) \quad (9)$$

Substitute from (7) into in equation (9) one gets

$$\begin{aligned} \frac{q_0 A}{s^2} = & \rho c_p \left[ \sqrt{\frac{\alpha}{s}} C_1 \exp\left(\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} C_1 \right] - \rho c_p \left[ \sqrt{\frac{\alpha}{s}} C_2 \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} C_2 \right] + \frac{h_d}{s} C_1 \exp\left(\sqrt{\frac{s}{\alpha}} d\right) + \frac{h_d}{s} \\ & C_2 \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) + \frac{h_0}{s} (C_1 + C_2) \end{aligned} \quad (10)$$

While equation (8) gives:

$$\lambda \left( C_1 \sqrt{\frac{s}{\alpha}} - C_2 \sqrt{\frac{s}{\alpha}} \right) = -\frac{q_0 A}{s} + h_0 (C_1 + C_2) \quad (11)$$

To find  $C_1$  and  $C_2$  one has to solve both equations (10) and (11) simultaneously.

Equation (11) can be rearranged to give:

$$A q_o = C_1 \lambda \left[ \frac{h_o s}{\lambda} - s \sqrt{\frac{s}{\alpha}} \right] + C_2 \lambda \left[ s \sqrt{\frac{s}{\alpha}} + \frac{s h_o}{\lambda} \right] \tag{12}$$

Equation (12) can further be rewritten as:

$$A q_o = C_1 a + C_2 b \tag{13}$$

Where,

$$a = \lambda \left[ \frac{h_o s}{\lambda} - s \sqrt{\frac{s}{\alpha}} \right] \tag{14}$$

and

$$b = \lambda \left[ s \sqrt{\frac{s}{\alpha}} + \frac{s h_o}{\lambda} \right] \tag{15}$$

Equation (10) can be rewritten as:

$$\begin{aligned} \frac{q_o A}{s^2} = & C_1 \left[ \rho c_p \sqrt{\frac{\alpha}{s}} \exp\left(\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} \rho c_p + \frac{h_d}{s} \exp\left(\sqrt{\frac{s}{\alpha}} d\right) + \frac{h_o}{s} \right] \\ & - C_2 \left[ \rho c_p \sqrt{\frac{\alpha}{s}} \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} \rho c_p - \frac{h_d}{s} \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) - \frac{h_o}{s} \right] \end{aligned} \tag{16}$$

Equation (16) can be rewritten as:

$$\frac{q_o A}{s^2} = C_1 g - C_2 h \tag{17}$$

Where,

$$g = \rho c_p \sqrt{\frac{\alpha}{s}} \exp\left(\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} \rho c_p + \frac{h_d}{s} \exp\left(\sqrt{\frac{s}{\alpha}} d\right) + \frac{h_o}{s} \tag{18}$$

and,

$$h = \rho c_p \sqrt{\frac{\alpha}{s}} \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} \rho c_p - \frac{h_d}{s} \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) - \frac{h_o}{s} \tag{19}$$

Solving equations (13) and (17) simultaneously one gets:

$$C_1 = \frac{A q_o \left( h + \frac{b}{s^2} \right)}{(a h + g b)} \tag{20}$$

and

$$C_2 = \frac{A q_o \left( g - \frac{a}{s^2} \right)}{(a h + g b)} \tag{21}$$

Let us substitute for  $C_1$  and  $C_2$  into equation (7) one gets:

$$\bar{T}(x, s) = \frac{A q_o \left( h + \frac{b}{s^2} \right)}{(a h + g b)} \exp\left(\sqrt{\frac{s}{\alpha}} x\right) + \frac{A q_o \left( g - \frac{a}{s^2} \right)}{(a h + g b)} \exp\left(-\sqrt{\frac{s}{\alpha}} x\right) \tag{22}$$

Let us simplify both the numerator and the denominator in equation (22) in the following steps:

The numerator has the form:

$$A q_o \left[ h \exp\left(\sqrt{\frac{s}{\alpha}} x\right) + \frac{b}{s^2} \exp\left(\sqrt{\frac{s}{\alpha}} x\right) + g \exp\left(-\sqrt{\frac{s}{\alpha}} x\right) - \frac{a}{s^2} \exp\left(-\sqrt{\frac{s}{\alpha}} x\right) \right] \tag{23}$$

Substituting for a,b,g and h from equations (14),(15),(18) and (19) into equation (23) one gets the numerator in the form:

$$\begin{aligned}
 & A q_o \left[ \rho c_p \sqrt{\frac{\alpha}{s}} \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} \rho c_p - \frac{h_d}{s} \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) - \frac{h_o}{s} \right] \exp\left(\sqrt{\frac{s}{\alpha}} x\right) + A q_o \left( \frac{\lambda}{s} \sqrt{\frac{s}{\alpha}} + \frac{h_o}{s} \right) \exp\left(\sqrt{\frac{s}{\alpha}} x\right) \\
 & + A q_o \left[ \rho c_p \sqrt{\frac{\alpha}{s}} \exp\left(\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} \rho c_p + \frac{h_d}{s} \exp\left(\sqrt{\frac{s}{\alpha}} d\right) + \frac{h_o}{s} \right] \exp\left(-\sqrt{\frac{s}{\alpha}} x\right) \\
 & - A q_o \left( \frac{h_o}{s} - \frac{\lambda}{s} \sqrt{\frac{s}{\alpha}} \right) \exp\left(-\sqrt{\frac{s}{\alpha}} x\right)
 \end{aligned} \tag{24}$$

Equation (24) can be rearranged in the form:

$$\begin{aligned}
 & A q_o \rho c_p \sqrt{\frac{\alpha}{s}} \left( \exp\sqrt{\frac{s}{\alpha}} (x-d) + \exp-\sqrt{\frac{s}{\alpha}} (x-d) \right) - A q_o \rho c_p \sqrt{\frac{\alpha}{s}} \left[ \exp\sqrt{\frac{s}{\alpha}} x + \exp-\sqrt{\frac{s}{\alpha}} x \right] \\
 & - A q_o \frac{h_o}{s} \left[ \exp\sqrt{\frac{s}{\alpha}} x - \exp-\sqrt{\frac{s}{\alpha}} x \right] + A q_o \frac{h_d}{s} \left[ \exp\sqrt{\frac{s}{\alpha}} (d-x) - \exp-\sqrt{\frac{s}{\alpha}} (d-x) \right] \\
 & + A q_o \frac{h_o}{s} \left[ \exp\sqrt{\frac{s}{\alpha}} x - \exp-\sqrt{\frac{s}{\alpha}} x \right] \\
 & + A q_o \frac{\lambda}{s} \sqrt{\frac{s}{\alpha}} \left[ \exp\sqrt{\frac{s}{\alpha}} x + \exp-\sqrt{\frac{s}{\alpha}} x \right]
 \end{aligned} \tag{25}$$

Considering the hyperbolic functions

$$\left. \begin{aligned}
 \cosh x &= \frac{e^x + e^{-x}}{2} \\
 \sinh x &= \frac{e^x - e^{-x}}{2}
 \end{aligned} \right\} \tag{26}$$

Equation (25) can thus be rewritten as:

$$\begin{aligned}
 & 2 A q_o \rho c_p \sqrt{\frac{\alpha}{s}} \cosh\sqrt{\frac{s}{\alpha}} (x-d) - 2 A q_o \rho c_p \sqrt{\frac{\alpha}{s}} \cosh\sqrt{\frac{s}{\alpha}} x - 2 A q_o \frac{h_o}{s} \sinh\sqrt{\frac{s}{\alpha}} x + 2 A q_o \frac{h_d}{s} \sinh\sqrt{\frac{s}{\alpha}} (d-x) \\
 & + 2 A q_o \frac{h_o}{s} \sinh\sqrt{\frac{s}{\alpha}} x + 2 A q_o \frac{\lambda}{s} \sqrt{\frac{s}{\alpha}} \cosh\sqrt{\frac{s}{\alpha}} x
 \end{aligned} \tag{27}$$

We finally obtained the numerator in the form:

$$\begin{aligned}
 & 2 \left( A q_o \rho c_p \sqrt{\frac{\alpha}{s}} \right) \cosh\sqrt{\frac{s}{\alpha}} (x-d) + 2 \left( A q_o \frac{\lambda}{s} \sqrt{\frac{s}{\alpha}} - A q_o \rho c_p \sqrt{\frac{\alpha}{s}} \right) \cosh\sqrt{\frac{s}{\alpha}} x \\
 & + 2 \left( A q_o \frac{h_d}{s} \right) \sinh\sqrt{\frac{s}{\alpha}} (d-x)
 \end{aligned} \tag{28}$$

From equation (22), the denominator equals

$$(ah+bg)$$

To simplify the denominator, let us substitute for a,b,g and h once more from equations (14),(15),(18) and (19) it attains the form:

$$\begin{aligned}
 & \left( h_o s - \lambda s \sqrt{\frac{s}{\alpha}} \right) \left[ \rho c_p \sqrt{\frac{\alpha}{s}} \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} \rho c_p - \frac{h_d}{s} \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) - \frac{h_o}{s} \right] \\
 & + \left( \lambda s \sqrt{\frac{s}{\alpha}} + h_o s \right) \left[ \rho c_p \sqrt{\frac{\alpha}{s}} \exp\left(\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} \rho c_p + \frac{h_d}{s} \exp\left(\sqrt{\frac{s}{\alpha}} d\right) + \frac{h_o}{s} \right]
 \end{aligned} \tag{29}$$

Equation (29) can be rearranged to give:

$$\begin{aligned}
 & h_o s \left[ \rho c_p \sqrt{\frac{\alpha}{s}} \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} \rho c_p - \frac{h_d}{s} \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) - \frac{h_o}{s} \right] \\
 & - \lambda s \sqrt{\frac{s}{\alpha}} \left[ \rho c_p \sqrt{\frac{\alpha}{s}} \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} \rho c_p - \frac{h_d}{s} \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) - \frac{h_o}{s} \right] \\
 & + \lambda s \sqrt{\frac{s}{\alpha}} \left[ \rho c_p \sqrt{\frac{\alpha}{s}} \exp\left(\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} \rho c_p + \frac{h_d}{s} \exp\left(\sqrt{\frac{s}{\alpha}} d\right) + \frac{h_o}{s} \right] + h_o s
 \end{aligned}$$

$$\left[ \rho c_p \sqrt{\frac{\alpha}{s}} \exp\left(\sqrt{\frac{s}{\alpha}} d\right) - \sqrt{\frac{\alpha}{s}} \rho c_p + \frac{h_d}{s} \exp\left(\sqrt{\frac{s}{\alpha}} d\right) + \frac{h_o}{s} \right] \tag{30}$$

Equation (30) can further be rearranged to be in the form:

$$\begin{aligned} h_o s \rho c_p \sqrt{\frac{\alpha}{s}} \left( \exp\left(\sqrt{\frac{s}{\alpha}} d\right) + \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) \right) - 2 h_o s \rho c_p \sqrt{\frac{\alpha}{s}} \\ + h_o h_d \left( \exp\left(\sqrt{\frac{s}{\alpha}} d\right) - \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) \right) + \lambda s \rho c_p \left( \exp\left(\sqrt{\frac{s}{\alpha}} d\right) - \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) \right) \\ + \lambda s \sqrt{\frac{s h_d}{\alpha}} \left( \exp\left(\sqrt{\frac{s}{\alpha}} d\right) + \exp\left(-\sqrt{\frac{s}{\alpha}} d\right) \right) + 2 h_o \lambda \sqrt{\frac{s}{\alpha}} \end{aligned} \tag{31}$$

Equation (31) can be rewritten in the form:

$$\begin{aligned} 2 h_o s \rho c_p \sqrt{\frac{\alpha}{s}} \cosh\left(\sqrt{\frac{s}{\alpha}} d\right) - 2 h_o s \rho c_p \sqrt{\frac{\alpha}{s}} + 2 h_o h_d \sinh\left(\sqrt{\frac{s}{\alpha}} d\right) + 2 \lambda s \rho c_p \sinh\left(\sqrt{\frac{s}{\alpha}} d\right) \\ + 2 \lambda \sqrt{\frac{s h_d}{\alpha}} \cosh\left(\sqrt{\frac{s}{\alpha}} d\right) + 2 h_o \lambda \sqrt{\frac{s}{\alpha}} \end{aligned} \tag{32}$$

Taking into account that:

$$2 h_o \lambda \sqrt{\frac{s}{\alpha}} = 2 h_o \sqrt{\lambda s \rho c_p} \tag{33}$$

and

$$-2 h_o s \rho c_p \sqrt{\frac{\alpha}{s}} = -2 h_o \sqrt{\lambda s \rho c_p} \tag{34}$$

Moreover, it is worth to note that.

$$2 h_o s \rho c_p \sqrt{\frac{\alpha}{s}} = 2 h_o \sqrt{\frac{s^2 \rho^2 c_p^2 \lambda}{s \rho c_p}} = 2 h_o \sqrt{\lambda s \rho c_p} \tag{35}$$

and

$$2 h_d \lambda \sqrt{\frac{s}{\alpha}} = 2 h_d \sqrt{\frac{s \rho c_p \lambda^2}{\lambda}} = 2 h_d \sqrt{\lambda s \rho c_p} \tag{36}$$

This makes it possible to write equation (32) for the denominator in the form:

$$2 \cosh\left(\sqrt{\frac{s}{\alpha}} d\right) (h_o + h_d) \sqrt{\lambda s \rho c_p} + 2 \sinh\left(\sqrt{\frac{s}{\alpha}} d\right) (h_o h_d + \lambda s \rho c_p) \tag{37}$$

Finally we get the following expression for  $T(x, s)$  from equations (28) and (37) in the form:

$$\begin{aligned} \frac{2 \left( A q_o \rho c_p \sqrt{\frac{\alpha}{s}} \right) \cosh\sqrt{\frac{s}{\alpha}} (x - d) + 2 \left( A q_o \frac{\lambda}{s} \sqrt{\frac{s}{\alpha}} - A q_o \rho c_p \sqrt{\frac{\alpha}{s}} \right) \cosh\sqrt{\frac{s}{\alpha}} x + 2 \left( A q_o \frac{h_d}{s} \right) \sinh\sqrt{\frac{s}{\alpha}} (d - x)}{2 \cosh\left(\sqrt{\frac{s}{\alpha}} d\right) \sqrt{\lambda s \rho c_p} (h_o + h_d) + 2 \sinh\left(\sqrt{\frac{s}{\alpha}} d\right) (h_o h_d + \lambda s \rho c_p)} \end{aligned} \tag{38}$$

We cannot find from the standard tables, the inverse Laplace transform for equation (38).

On the basis of mathematical logic one can simplify the expression of the denominator equation (37) as follows:

Since the heat transfer coefficient  $h_o \cong 10^5 \frac{W}{m^2K}$  also  $h_d \cong 10^5 \frac{W}{m^2K}$

One can conclude that



$$h_o h_d \gg (h_o + h_d)$$

Moreover,  $\lambda s \rho c_p > \sqrt{s \lambda \rho c_p}$

This makes it possible to put the denominator as follows:

$$= 2 ( h_o h_d + \lambda s \rho c_p ) \sinh \left( \sqrt{\frac{s}{\alpha}} d \right) \tag{39}$$

We still cannot find the Laplace inverse transform for  $\underline{T}(x, s)$  that is because the denominator consists of two terms:

Let us proceed as follows:

Since one cannot evaluate the order of magnitude of the term  $\lambda s \rho c_p$  relative to the term  $h_o h_d$ , we shall consider two probabilities as follows:

- (i) The case for which  $h_o h_d \gg \lambda s \rho c_p$ ,
- (ii) The case for which  $\lambda s \rho c_p \gg h_o h_d$

Thus we shall have eight expressions for both probabilities, that is because the numerator consists of four terms.

For the first probability ( $h_o h_d \gg \lambda s \rho c_p$ )

$$\text{let, } \underline{T}(x, s) = \underline{T}_1(x, s) + \underline{T}_2(x, s) + \underline{T}_3(x, s) + \underline{T}_4(x, s) \tag{40}$$

For the second probability ( $\lambda s \rho c_p \gg h_o h_d$ )

$$\text{let, } \bar{T}^*(x, s) = \bar{T}_1^*(x, s) + \bar{T}_2^*(x, s) + \bar{T}_3^*(x, s) + \bar{T}_4^*(x, s) \tag{41}$$

where

$$\bar{T}_1(x, s) = \frac{2 \left( A q_o \rho c_p \sqrt{\frac{\alpha}{s}} \right) \cosh \sqrt{\frac{s}{\alpha}} (x - d)}{2 h_o h_d \sinh \left( \sqrt{\frac{s}{\alpha}} d \right)}, \tag{42}$$

$$\bar{T}_2(x, s) = \frac{2 \left( A q_o \frac{\lambda}{s} \sqrt{\frac{s}{\alpha}} \right) \cosh \sqrt{\frac{s}{\alpha}} x}{2 h_o h_d \sinh \left( \sqrt{\frac{s}{\alpha}} d \right)}, \tag{43}$$

$$\bar{T}_3(x, s) = \frac{-2 \left( A q_o \rho c_p \sqrt{\frac{\alpha}{s}} \right) \cosh \sqrt{\frac{s}{\alpha}} x}{2 h_o h_d \sinh \left( \sqrt{\frac{s}{\alpha}} d \right)}, \tag{44}$$

$$\bar{T}_4(x, s) = \frac{2 \left( A q_o \frac{h_d}{s} \right) \sinh \sqrt{\frac{s}{\alpha}} (d - x)}{2 h_o h_d \sinh \left( \sqrt{\frac{s}{\alpha}} d \right)} \tag{45}$$

For the second probability ( $\lambda s \rho c_p \gg h_o h_d$ )

$$\bar{T}_1^*(x, s) = \frac{2 \left( A q_0 \rho c_p \sqrt{\frac{\alpha}{s}} \right) \cosh \sqrt{\frac{s}{\alpha}} (x - d)}{2 (\lambda s \rho c_p) \sinh \left( \sqrt{\frac{s}{\alpha}} d \right)}, \tag{46}$$

$$\bar{T}_2^*(x, s) = \frac{2 \left( A q_0 \frac{\lambda}{s} \sqrt{\frac{s}{\alpha}} \right) \cosh \sqrt{\frac{s}{\alpha}} x}{2 (\lambda s \rho c_p) \sinh \left( \sqrt{\frac{s}{\alpha}} d \right)}, \tag{47}$$

$$\bar{T}_3^*(x, s) = \frac{-2 \left( A q_0 \rho c_p \sqrt{\frac{\alpha}{s}} \right) \cosh \sqrt{\frac{s}{\alpha}} x}{2 (\lambda s \rho c_p) \sinh \left( \sqrt{\frac{s}{\alpha}} d \right)}, \tag{48}$$

$$\bar{T}_4^*(x, s) = \frac{2 \left( A q_0 \frac{h_d}{s} \right) \sinh \sqrt{\frac{s}{\alpha}} (d - x)}{2 (\lambda s \rho c_p) \sinh \left( \sqrt{\frac{s}{\alpha}} d \right)} \tag{49}$$

According to the standard tables of special Laplace transform:[17]

One finds the following transformations:

$$(1) \frac{\cosh x \sqrt{s}}{\sqrt{s} \sinh a \sqrt{s}} = \frac{1}{a} + \frac{2}{a} \sum_{n=1}^{\infty} (-1)^n e^{-n^2 \pi^2 t/a^2} \cdot \cos \frac{n \pi x}{a} \tag{50}$$

$$(2) \frac{\sinh x \sqrt{s}}{s^2 \sinh a \sqrt{s}} = \frac{x t}{a} + \frac{2 a^2}{\pi^3} \sum_{n=1}^{\infty} \frac{(-1)^n}{n^3} \left( 1 - e^{-n^2 \pi^2 t/a^2} \right) \cdot \sin \frac{n \pi x}{a} \tag{51}$$

$$(3) \frac{\sinh x \sqrt{s}}{s \sinh a \sqrt{s}} = \frac{x}{a} + \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^n}{n} e^{-n^2 \pi^2 t/a^2} \cdot \sin \frac{n \pi x}{a} \tag{52}$$

These make it possible to get the inverse transform of equations (42)-(49) in the form:

For the first probability ( $h_0 h_d \gg \lambda s \rho c_p$ )

$$T_1(x, t) = \frac{A q_0 \rho c_p \alpha}{h_0 h_d d} + \frac{2 A q_0 \rho c_p \alpha}{h_0 h_d d} \sum_{n=1}^{\infty} (-1)^n e^{-n^2 \pi^2 t \alpha / d^2} \cos \frac{n \pi (x - d)}{d} \tag{53}$$

$$T_2(x, t) = \frac{A q_0 \lambda}{h_0 h_d} \left[ \frac{1}{d} + \frac{2}{d} \sum_{n=1}^{\infty} (-1)^n e^{-n^2 \pi^2 t \alpha / d^2} \cos \frac{n \pi x}{d} \right] \tag{54}$$

$$T_3(x, t) = \frac{-A q_0 \rho c_p}{h_0 h_d} \left[ \frac{\alpha}{d} + \frac{2 \alpha}{d} \sum_{n=1}^{\infty} (-1)^n e^{-n^2 \pi^2 t \alpha / d^2} \cos \frac{n \pi x}{d} \right] \tag{55}$$

$$T_4(x, t) = \frac{A q_o}{h_o} \left[ \frac{(d-x)}{d} + \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^n}{n} e^{-n^2 \pi^2 \alpha t / d^2} \sin \frac{n \pi (d-x)}{d} \right] \quad (56)$$

For the second probability ( $\lambda \rho c_p \gg h_o h_d$ )

$$T_1^*(x, t) = \frac{A q_o \alpha t}{\lambda d} + \frac{2 A q_o d}{\lambda \pi^2} \sum_{n=1}^{\infty} \frac{(-1)^n}{-n^2} \left[ e^{-n^2 \pi^2 \alpha t / d^2} - 1 \right] \cos \frac{n \pi (x-d)}{d} \quad (57)$$

Note:

$$L^{-1} \left\{ \frac{f(s)}{s} \right\} = \int_0^t F(u) du \quad [2] \quad (58)$$

$$T_2^*(x, t) = \frac{A q_o}{\rho c_p} \left\{ \frac{t}{d} + \frac{2d}{\pi^2 \alpha} \sum_{n=1}^{\infty} \frac{(-1)^n}{-n^2} \left[ e^{-n^2 \pi^2 \alpha t / d^2} - 1 \right] \cos \frac{n \pi x}{d} \right\} \quad (59)$$

$$T_3^*(x, t) = \frac{-A q_o}{\lambda} \left\{ \frac{\alpha t}{d} + \frac{2d}{\pi^2} \sum_{n=1}^{\infty} \frac{(-1)^n}{-n^2} \left[ e^{-n^2 \pi^2 \alpha t / d^2} - 1 \right] \cos \frac{n \pi x}{d} \right\} \quad (60)$$

$$T_4^*(x, t) = \frac{A q_o h_d}{\lambda \rho c_p} \left\{ \frac{(d-x)t}{d} + \frac{2d^2}{\alpha \pi^3} \sum_{n=1}^{\infty} \frac{(-1)^n}{n^3} \left[ 1 - e^{-n^2 \pi^2 \alpha t / d^2} \right] \sin \frac{n \pi (d-x)}{d} \right\} \quad (61)$$

Thus the temperature profile for the first probability ( $h_o h_d \gg \lambda \rho c_p$ ) can be written in the form:

$$\begin{aligned} T(x, t) = & \frac{A q_o \rho c_p \alpha}{h_o h_d d} + \left\{ \frac{2 A q_o \rho c_p \alpha}{h_o h_d d} \sum_{n=1}^{\infty} (-1)^n e^{-n^2 \pi^2 \alpha t / d^2} \cos \frac{n \pi (x-d)}{d} \right\} \\ & + \frac{A q_o \lambda}{h_o h_d} \left\{ \frac{1}{d} + \frac{2}{d} \sum_{n=1}^{\infty} (-1)^n e^{-n^2 \pi^2 \alpha t / d^2} \cos \frac{n \pi x}{d} \right\} - \frac{A q_o \rho c_p}{h_o h_d} \left\{ \frac{\alpha}{d} + \frac{2 \alpha}{d} \sum_{n=1}^{\infty} (-1)^n e^{-n^2 \pi^2 \alpha t / d^2} \cos \frac{n \pi x}{d} \right\} \\ & + \frac{A q_o}{h_o} \left\{ \frac{(d-x)}{d} + \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^n}{n} e^{-n^2 \pi^2 \alpha t / d^2} \sin \frac{n \pi (d-x)}{d} \right\} \quad (62) \end{aligned}$$

Equation (62) can be rearranged to give:

$$\begin{aligned} T(x, t) = & \frac{A q_o \rho c_p \alpha}{h_o h_d d} + \left\{ \frac{2 A q_o \rho c_p \alpha}{h_o h_d d} \sum_{n=1}^{\infty} (-1)^n e^{-n^2 \pi^2 \alpha t / d^2} \cos \frac{n \pi (x-d)}{d} \right\} \\ & + \frac{A q_o}{h_o} \left\{ \frac{(d-x)}{d} + \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^n}{n} e^{-n^2 \pi^2 \alpha t / d^2} \sin \frac{n \pi (d-x)}{d} \right\} \quad (63) \end{aligned}$$

The temperature profile for the second probability

( $\lambda \rho c_p \gg h_o h_d$ ) can be written as:

$$T(x, t) = \frac{A q_o \alpha t}{\lambda d}$$



$$\begin{aligned}
 & + \frac{2 A q_0 d}{\lambda \pi^2} \sum_{n=1}^{\infty} \frac{(-1)^n}{-n^2} \left[ e^{-n^2 \pi^2 t \alpha / d^2} - 1 \right] \cos \frac{n \pi (x-d)}{d} \\
 & + \frac{A q_0}{\rho c_p} \left\{ \frac{t}{d} + \frac{2 d}{\pi^2 \alpha} \sum_{n=1}^{\infty} \frac{(-1)^n}{-n^2} \left[ e^{-n^2 \pi^2 t \alpha / d^2} - 1 \right] \cos \frac{n \pi x}{d} \right\} \\
 & - \frac{A q_0}{\lambda} \left\{ \frac{\alpha t}{d} + \frac{2 d}{\pi^2} \sum_{n=1}^{\infty} \frac{(-1)^n}{-n^2} \left( e^{-n^2 \pi^2 t \alpha / d^2} - 1 \right) \cos \frac{n \pi x}{d} \right\} \\
 & + \frac{A q_0 h_d}{\lambda \rho c_p} \left\{ \frac{(d-x)t}{d} + \frac{2 d^2}{\alpha \pi^3} \sum_{n=1}^{\infty} \frac{(-1)^n}{n^3} \left( 1 - e^{-n^2 \pi^2 t \alpha / d^2} \right) \sin \frac{n \pi (d-x)}{d} \right\} \tag{64}
 \end{aligned}$$

This profile can further be simplified to be in the form

$$\begin{aligned}
 T(x, t) = & \frac{A q_0 \alpha t}{\lambda d} + \frac{2 A q_0 d}{\lambda \pi^2} \sum_{n=1}^{\infty} \frac{(-1)^n}{-n^2} \left[ e^{-n^2 \pi^2 t \alpha / d^2} - 1 \right] \cos \frac{n \pi (x-d)}{d} \\
 & + \frac{A q_0 h_d}{\lambda \rho c_p} \left\{ \frac{(d-x)t}{d} + \frac{2 d^2}{\alpha \pi^3} \sum_{n=1}^{\infty} \frac{(-1)^n}{n^3} \left( 1 - e^{-n^2 \pi^2 t \alpha / d^2} \right) \sin \frac{n \pi (d-x)}{d} \right\} \tag{65}
 \end{aligned}$$

Expression (65) indicates that as the coefficient of cooling  $h_d$  increases the temperature increases. This contradicts the well known physical behavior according to which as cooling increases the temperature of the target decreases.

To overcome this situation one has to modify the original expression for  $T_4^*(x, s)$  written in the form:

$$\bar{T}_4^*(x, s) = \frac{2 (A q_0 \frac{h_d}{s}) \sinh \sqrt{\frac{s}{\alpha}} (d-x)}{2 (h_0 h_d + \lambda s \rho c_p) \sinh \left( \sqrt{\frac{s}{\alpha}} d \right)} \tag{66}$$

Let us divide both the numerator and the denominator in equation (66) by  $h_d$ , one gets:

$$\bar{T}_4^*(x, s) = \frac{2 (A q_0) \sinh \sqrt{\frac{s}{\alpha}} (d-x)}{2 \left( h_0 s + \frac{\lambda s^2 \rho c_p}{h_d} \right) \sinh \left( \sqrt{\frac{s}{\alpha}} d \right)} \tag{67}$$

Discussing the order of magnitude of different terms in equation (67) one finds that:

$$h_0 s \gg \frac{\lambda s \rho c_p}{h_d},$$

Since  $h_0 = h_d = 10^6 \text{ w/m}^2\text{K}$

Thus one can write for  $\bar{T}_4^*(x, s)$  the following expression

$$\bar{T}_4^*(x, s) = \frac{2 A q_0 \sinh \sqrt{\frac{s}{\alpha}} (d-x)}{2 h_0 s \sinh \left( \sqrt{\frac{s}{\alpha}} d \right)} \tag{68}$$

The Laplace inverse transform of equation (68) gives: [2]

$$\begin{aligned}
 \bar{T}_4^* = & \frac{A q_0}{h_0} \left\{ \frac{(d-x)}{d} + \right. \\
 & \left. + \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^n}{n} e^{-n^2 \pi^2 t \alpha / d^2} \sin \frac{n \pi (d-x)}{d} \right\} \tag{69}
 \end{aligned}$$



Finally for the second probability one gets the modified expression in the form:

$$T(x, t) = \frac{A q_0 \alpha t}{\lambda d} + \frac{2A q_0 d}{\lambda \pi^2} \sum_{n=1}^{\infty} \frac{(-1)^n}{-n^2} \left[ e^{-n^2 \pi^2 t \alpha / d^2} - 1 \right] \cos \frac{n\pi(x-d)}{d} + \frac{A q_0}{h_0} \left\{ \frac{(d-x)}{d} + \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^n}{n} e^{-n^2 \pi^2 t \alpha / d^2} \sin \frac{n\pi(d-x)}{d} \right\} \quad (70)$$

Equation (70) does not satisfy the condition (2) for which  $T(x,0)=0$  (2) ,

instead one gets

$$:T(x, 0) = \frac{A q_0}{h_0} \left\{ \frac{(d-x)}{d} + \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^n}{n} \sin \frac{n\pi(d-x)}{d} \right\} \quad (71)$$

Thus to satisfy the condition (2) one has to subtract equation (71) from equation (70) to get the profile for the second probability in the form:

$$T(x, t) = \frac{A q_0 \alpha t}{\lambda d} + \frac{2A q_0 d}{\lambda \pi^2} \sum_{n=1}^{\infty} \frac{(-1)^n}{-n^2} \left[ e^{-n^2 \pi^2 t \alpha / d^2} - 1 \right] \cos \frac{n\pi(x-d)}{d} + \frac{A q_0}{h_0} \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^n}{n} (e^{-n^2 \pi^2 t \alpha / d^2} - 1) \sin \frac{n\pi(d-x)}{d} \quad (72)$$

Moreover, Equation (63) for the first probability does not also satisfy the condition in equation (2),  $T(x,0)=0$ .

Instead one gets:

$$T(x, 0) = \frac{A q_0 \rho c_p \alpha}{h_0 h_d d} + \left\{ \frac{2 A q_0 \rho c_p \alpha}{h_0 h_d d} \sum_{n=1}^{\infty} (-1)^n \cos \frac{n\pi(x-d)}{d} \right\} + \frac{A q_0}{h_0} \left\{ \frac{(d-x)}{d} + \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^n}{n} \sin \frac{n\pi(d-x)}{d} \right\} \quad (73)$$

Thus we have to subtract equation (73) form equation (63) to get the profile for the first probability ( $h_0 h_d > \lambda \rho c_p$ ) in the form:

$$T(x, t) = \left\{ \frac{2 A q_0 \rho c_p \alpha}{h_0 h_d d} \sum_{n=1}^{\infty} (-1)^n (e^{-n^2 \pi^2 t \alpha / d^2} - 1) \cos \frac{n\pi(x-d)}{d} \right\} + \frac{A q_0}{h_0} \left\{ \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^n}{n} (e^{-n^2 \pi^2 t \alpha / d^2} - 1) \sin \frac{n\pi(d-x)}{d} \right\} \quad (74)$$

Thus the total profile for the problem for both probabilities is the sum of equations (72) and (74).

This gives

$$T(x, t) = \left\{ \frac{2 A q_0 \rho c_p \alpha}{h_0 h_d d} \sum_{n=1}^{\infty} (-1)^n (e^{-n^2 \pi^2 t \alpha / d^2} - 1) \cos \frac{n\pi(x-d)}{d} \right\} + \frac{A q_0}{h_0} \left\{ \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^n}{n} (e^{-n^2 \pi^2 t \alpha / d^2} - 1) \sin \frac{n\pi(d-x)}{d} \right\} + \frac{A q_0 \alpha t}{\lambda d} + \frac{2A q_0 d}{\lambda \pi^2} \sum_{n=1}^{\infty} \frac{(-1)^n}{n^2} \left[ 1 - e^{-n^2 \pi^2 t \alpha / d^2} \right] \cos \frac{n\pi(x-d)}{d} \quad (75)$$

### 3. Computations

As an illustrative example computations for a slab of silver sulfide material of thickness  $d = 1 \times 10^{-3} m$ , irradiated by a constant laser irradiance (cw laser) of value  $q_0 = 0.5 \times 10^8 W/m^2$ .



The thermal and optical properties of the slab material are assumed to be temperature independent and are given in table 1 [15].

Cooling conditions at the front and rear surfaces of the slab are considered through the coefficient of heat transfer by convection at the front surface  $h_o = 10^6 \text{ w/m}^2\text{K}$  and that at the rear surface  $h_d = 10^6 \text{ w/m}^2\text{K}$ .

**Table 1.** The physical, thermal and optical properties of the silver sulfide ( $Ag_2S$ ) slab material [15]

Material	$\rho$ ( $\text{kg/m}^3$ )	$\lambda$ ( $\text{W/m.K}$ )	$c_p$ ( $\text{J/kg.K}$ )	$\alpha$ ( $\text{m}^2/\text{sec}$ )	$T_m$ (K)	A
Silver sulfide	7234	25	309	$1.12 \times 10^{-5}$	1098	0.7

Computations using (equation 75) for the profiles  $T(0,t)$ ,  $T(d,t)$  and  $T(x,t)$  are performed with the aid of MATLAB-2022 version.

The obtained results are given in tables 2,3 and 4 and are illustrated graphically in Fig.1,2 and 3 respectively.

**Table 2.** The front surface temperature  $T(0, t)$ , K.


Time (t)/second	$T(0, t)$ ,K
0	0
$0.5 \times 10^{-2}$	314.8418
$1 \times 10^{-2}$	469.0836
$1.5 \times 10^{-2}$	587.8606
$2 \times 10^{-2}$	689.1478
$2.5 \times 10^{-2}$	780.6792
$3 \times 10^{-2}$	866.6308
$3.5 \times 10^{-2}$	949.3755
$4 \times 10^{-2}$	1030.3
$4.2 \times 10^{-2}$	1062.3
$4.4 \times 10^{-2}$	1094.2
$4.425 \times 10^{-2}$ ( $t_{cr}$ )	1098.2

**Table 3.** The rear surface temperature  $T(d, t)$ , K.


Time (t)/second	$T(d,t)$ ,K
0	0
$1 \times 10^{-2}$	13.1563
$1.5 \times 10^{-2}$	52.6594
$2 \times 10^{-2}$	108.3344
$2.5 \times 10^{-2}$	173.6207
$3 \times 10^{-2}$	244.4711
$3.5 \times 10^{-2}$	318.5266
$4 \times 10^{-2}$	394.4267

**Table 4.** The temperature profile  $T(x, t)$ , K at  $t = 3 \times 10^{-2}$  sec.


X /m	T(x, t),K
0	866.6308
$0.2 \times 10^{-3}$	746.9854
$0.3 \times 10^{-3}$	612.5593
$0.4 \times 10^{-3}$	523.4662
$0.5 \times 10^{-3}$	454.2109
$0.6 \times 10^{-3}$	379.5121
$0.7 \times 10^{-3}$	320.4793
$0.8 \times 10^{-3}$	289.4523
$0.9 \times 10^{-3}$	265.8939
$1 \times 10^{-3}$	244.4711

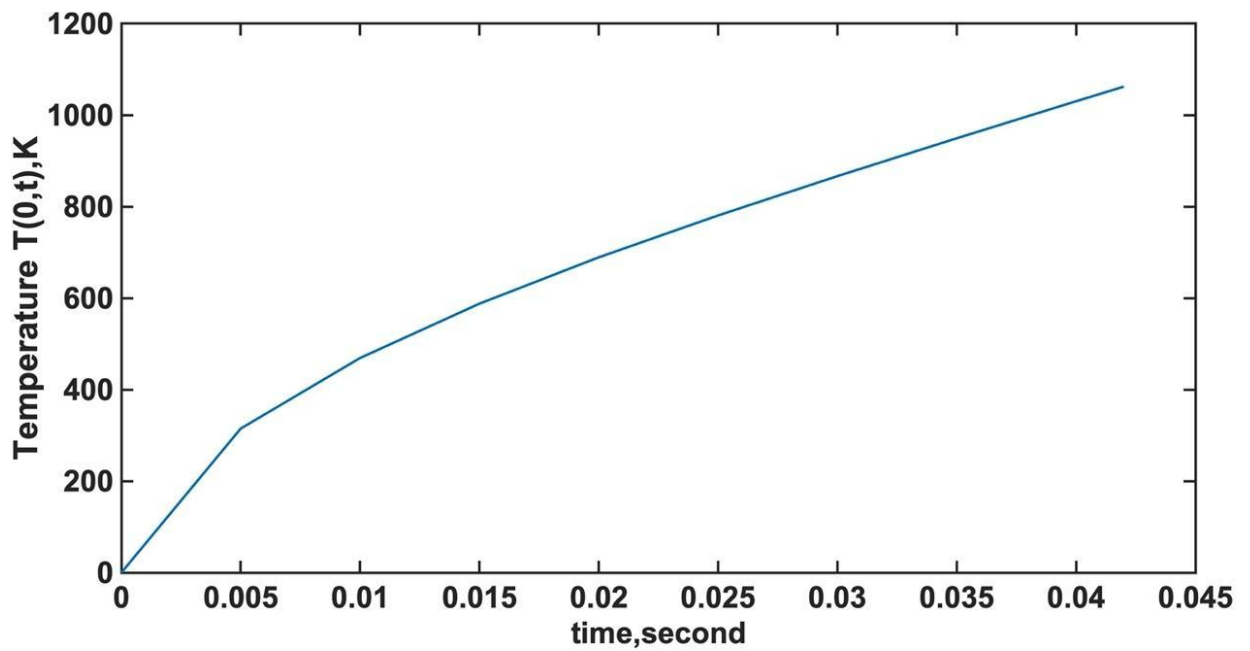

**Figure 1.** The temperature of the front surface  $T(0, t)$ , K .

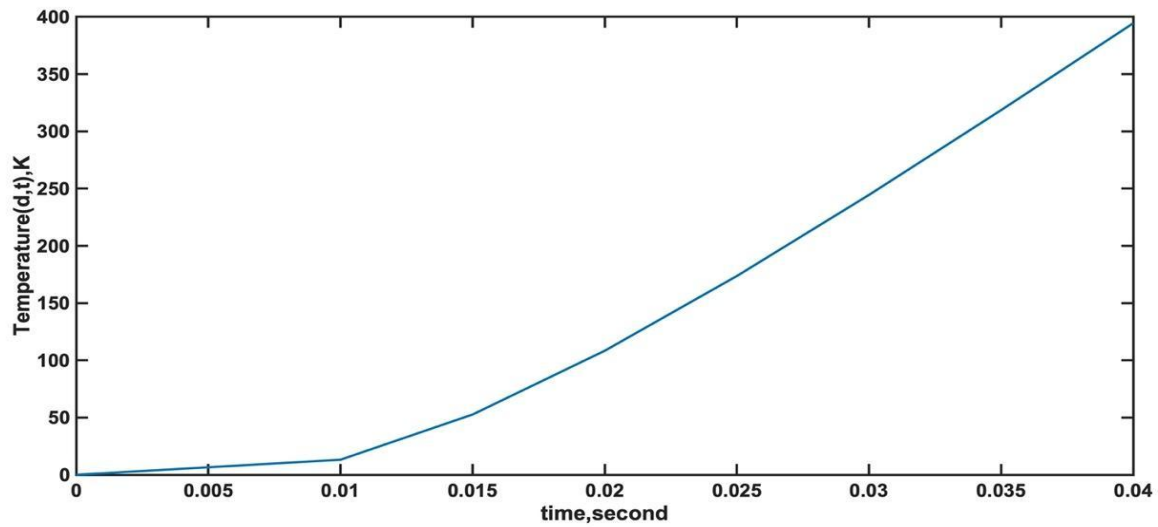

**Figure 2.** The temperature of the rear surface  $T(d, t)$ , K.

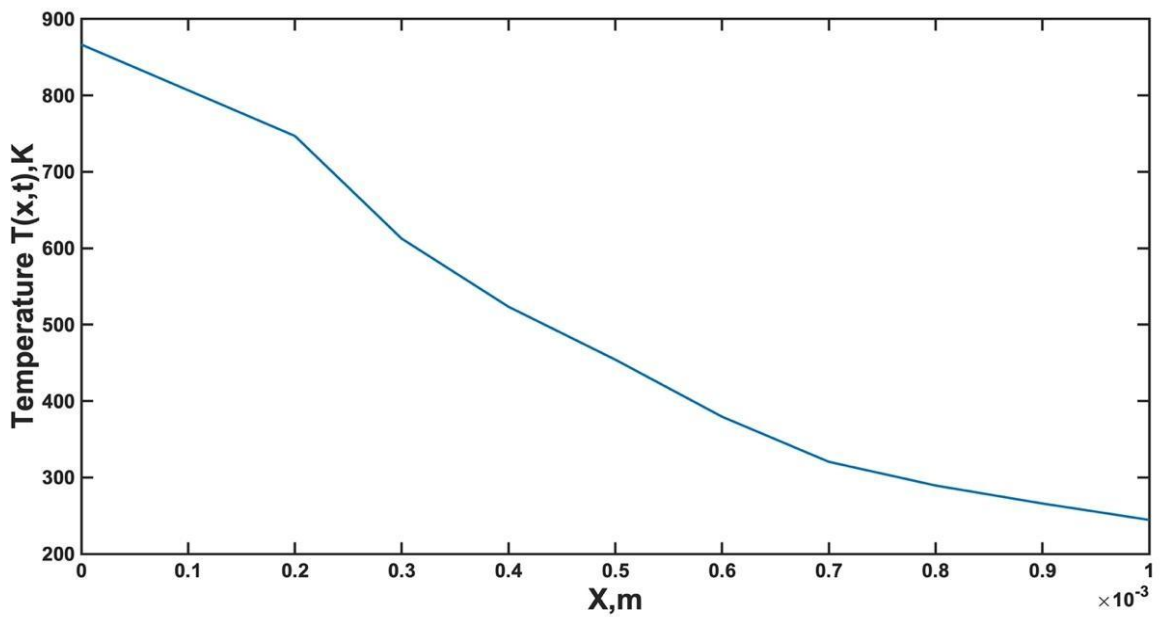

**Figure 3.** The temperature profile  $T(x, t)$ , K at  $t = 3 \times 10^{-2}$  sec.

#### 4. Conclusions

The obtained results make it possible to highlight the following conclusions:

- 1- Laplace integral transfer technique is promising in solving heat transfer problems though it is somewhat cumbersome.
- 2- The obtained mathematical expressions for the profiles reveal that the dependence of these profiles on both the laser irradiance  $q_0$   $W/m^2$  and the optical absorption A is linear.
- 3- The dependence of these profiles on the other physical and thermal parameters is not linear.
- 4- The expressions for the profiles  $T(0,t)$ ,  $T(d,t)$  and  $T(x,t)$  are obtained in a simple form. This is important for practical and technological applications.
- 5- The critical time ( $t_{cr}$ ) required to initiate melting (damage) at the front surface can easily be obtained for which one can put  $T(0, t_{cr}) = T_m$ , where  $T_m$  is the melting temperature of the slab material. For the considered target  $t_{cr} = 4.425 \times 10^{-2}$  second.

## References

- [1] Ready, J.F. (1965). Effects due to absorption of laser radiation. *J. Appl. Phys.*, 36(2), 462-468.  
[URL: https://pubs.aip.org/aip/jap/article-abstract/36/2/462/347335/Effects-Due-to-Absorption-of-Laser-Radiation](https://pubs.aip.org/aip/jap/article-abstract/36/2/462/347335/Effects-Due-to-Absorption-of-Laser-Radiation)  
<https://doi.org/10.1063/1.1714012>
- [2] Schaum's outline series. MCGRAW-HILL Book Company Appendix B:252, (M.R. Spiegel, 1965).
- [3] Allmen, M.v. (1976). Laser drilling velocity in metals. *J. Appl. Phys.*, 47, 5460.  
[URL: https://pubs.aip.org/aip/jap/article-abstract/47/12/5460/7379/Laser-drilling-velocity-in-metals](https://pubs.aip.org/aip/jap/article-abstract/47/12/5460/7379/Laser-drilling-velocity-in-metals)  
<https://doi.org/10.1063/1.322578>
- [4] Warren, R.E., Sparks, M. (1979). Laser heating of a slab having temperature-dependent surface absorptance. *J. Appl. Phys.*, 50(12), 7952-7957.  
[URL: https://pubs.aip.org/aip/jap/article-abstract/50/12/7952/9187/Laser-heating-of-a-slab-having-temperature](https://pubs.aip.org/aip/jap/article-abstract/50/12/7952/9187/Laser-heating-of-a-slab-having-temperature)  
<https://doi.org/10.1063/1.325972>
- [5] Porteus, J.O., Choyke, W.J. (1980). R.A. Hoffman, Pulsed laser damage characteristics of vapor-deposited copper mirrors on Silicon Carbide Substrate. *Appl. Opt.*, 19, 451.  
[URL: https://opg.optica.org/ao/abstract.cfm?uri=ao-19-3-451](https://opg.optica.org/ao/abstract.cfm?uri=ao-19-3-451)  
<https://doi.org/10.1364/AO.19.000451>
- [6] Bhattacharyya, A., Streetman, R.G. (1981). Dynamics of pulsed CO<sub>2</sub> laser annealing of silicon. *J. Phys. D: Appl. Phys.*, 14, 67-72.  
[URL: https://iopscience.iop.org/article/10.1088/0022-3727/14/5/002](https://iopscience.iop.org/article/10.1088/0022-3727/14/5/002)  
<https://doi.org/10.1088/0022-3727/14/5/002>
- [7] El-Adawi, M.K., Elshehawey, E.F. (1986). Heating a slab induced by a time-dependent laser irradiance-An exact solution. *J. Appl. Phys.*, 60(7), 2250-2255.  
[URL: https://pubs.aip.org/aip/jap/article-abstract/60/7/2250/12228/Heating-a-slab-induced-by-a-time-dependent-laser](https://pubs.aip.org/aip/jap/article-abstract/60/7/2250/12228/Heating-a-slab-induced-by-a-time-dependent-laser)  
<https://doi.org/10.1063/1.337184>
- [8] El-Adawi, M.K., Shalaby, S.A., Elshehawey, E.F. (1989). Laser heating and melting of thin films with time-dependent absorption. An exact solution for time intervals greater than the transit time. *J. Appl. Phys.*, 65(10), 3781-3785.  
[URL: https://pubs.aip.org/aip/jap/article-abstract/65/10/3781/174850/Laser-heating-and-melting-of-thin-films-with-time](https://pubs.aip.org/aip/jap/article-abstract/65/10/3781/174850/Laser-heating-and-melting-of-thin-films-with-time)  
<https://doi.org/10.1063/1.343389>
- [9] Dhumvre, S.S., Lokhande, C.D. (1991). Solution growth of silver sulphide thin films. *Material Chemistry and Physics*, 27, 321-324. [URL: https://www.sciencedirect.com/science/article/abs/pii/025405849190128H](https://www.sciencedirect.com/science/article/abs/pii/025405849190128H)  
[https://doi.org/10.1016/0254-0584\(91\)90128-H](https://doi.org/10.1016/0254-0584(91)90128-H)
- [10] El-Adawi, M.K., Abd El-Naby, M.A., Shalaby, S.A. (1995). Laser heating of a two-layer system with constant surface absorption: an exact solution. *Int. J. Heat Mass Transfer*, 38(5), 947-952.  
[URL: https://www.sciencedirect.com/science/article/abs/pii/001793109400162O](https://www.sciencedirect.com/science/article/abs/pii/001793109400162O)  
[https://doi.org/10.1016/0017-9310\(94\)00162-O](https://doi.org/10.1016/0017-9310(94)00162-O)
- [11] El-Adawi, M.K., Shalaby, S.A., Abd El-Naby, M.A. (1996). Laser heating of a slab with temperature dependent absorptance in relation to the cooling conditions. *Vacuum*, 47(10), 1167-1173.  
[URL: https://www.infona.pl/resource/bwmeta1.element.elsevier-94cdb075-f3bd-34fa-9600-27ec594e6fac](https://www.infona.pl/resource/bwmeta1.element.elsevier-94cdb075-f3bd-34fa-9600-27ec594e6fac)  
[https://doi.org/10.1016/0042-207X\(96\)00152-2](https://doi.org/10.1016/0042-207X(96)00152-2)
- [12] El-Adawi, M.K., Shalaby, S.A., Mostafa, S.S., Kotkata, M.F. (2007). Laser thermal response of a finite slab as a function of the laser pulse parameters. *Optics & Laser Technology*, 39, 424-429.

URL:<https://www.sciencedirect.com/science/article/abs/pii/S0030399205001350>

<https://doi.org/10.1016/j.optlastec.2005.06.038>

[13] El-Adawi, M.K., Al-Fanak, H.S. (2013). Laser heating of a finite silver selenide slab. *Optics & Laser Technology*, 49, 231-236.

URL:<https://www.sciencedirect.com/science/article/abs/pii/S0030399213000078>

<https://doi.org/10.1016/j.optlastec.2012.12.031>

[14] Patil, A.B., Bhanage, B.M. (2014). Shape selectivity using ionic liquid for the preparation of silver and silver sulphide nanomaterials. *Phys. Chem. Phys.*, 16, 3027-3035.

URL:<https://pubs.rsc.org/en/content/articlelanding/2013/cp/c3cp54382j/unauth>

<https://doi.org/10.1039/c3cp54382j>

[15] Handbook of Chemistry and Physics edition 95(4). CRC press 89, (W.M. Haynes, 2014-2015)

URL:[https://books.google.com.eg/books?hl=ar&lr=&id=bNDMBQAAQBAJ&oi=fnd&pg=PP1&dq=handbook+of+chemistry+and+physics+edition+99&ots=Ha6ywkuv0K&sig=dM5hDLOKag3ordLHxQ6bVWHfDwo&redir\\_esc=y#v=onepage&q=handbook%20of%20chemistry%20and%20physics%20edition%2099&f=false](https://books.google.com.eg/books?hl=ar&lr=&id=bNDMBQAAQBAJ&oi=fnd&pg=PP1&dq=handbook+of+chemistry+and+physics+edition+99&ots=Ha6ywkuv0K&sig=dM5hDLOKag3ordLHxQ6bVWHfDwo&redir_esc=y#v=onepage&q=handbook%20of%20chemistry%20and%20physics%20edition%2099&f=false)

<https://doi.org/10.1201/b17118>

[16] Peng, Q. (2016). An analytical solution for a transient temperature field during laser heating of a finite slab. *Applied Mathematical Modeling*, 40, 4129-4135.

URL:<https://www.sciencedirect.com/science/article/pii/S0307904X15007386>

<https://doi.org/10.1016/j.apm.2015.11.024>

[17] Seeman, O., et al. (2023). Refractive plasma optics for relativistic laser beams. *Nature Communications*, 14, 3296-3302. URL:<https://www.nature.com/articles/s41467-023-38937-0>

<https://doi.org/10.1038/s41467-023-38937-0>

[18] Ramadlan, M.Z. et al. (2023). Near-Infrared (NIR) silver sulfide ( $Ag_2S$ ) semiconductor photocatalyst film for degradation of methylene blue solution. *Materials*, 16, 437-458. URL:<https://www.mdpi.com/1996-1944/16/1/437>

<https://doi.org/10.3390/ma16010437>